# Maximum Energy Efficiency Lowest TCO

The Eaton 93PR is simply the most efficient UPS in its class, offering the lowest Total Cost of Ownership. Thanks to Eaton's advanced algorithms and energy-saving features, the 93PR achieves up to 99% efficiency. This efficiency is well proven with installations in major datacentre hubs in the Asia Pacific region and around the world.

#### 99% efficiency - Energy Saver System (ESS)

Improves the 93PR efficiency levels to 99%, by suspending the power modules when power conditioning is not required.

The power is fed through the static bypass switch, and in the event of exceeding pre-set input limits the UPS is ready to switch to double-conversion mode in under two milliseconds. In addition to extremely low losses, the ESS mode provides filtering against fast low-energy transients. It is simply the most advanced, most reliable, fastest-reacting energy-saver architecture available.

In addition to saving energy, this technology enhances the reliability of the system by reducing electrical stress in the power electronic components, extending the UPS life time and thus reducing total cost of ownership.

# 

Load (% of nominal)

# Optimised double conversion efficiency - Variable Module Management System (VMMS)

For applications where ESS may not be optimal, for example with very low quality mains, VMMS technology includes automatic variable power module management. The system automatically suspends and engages modules as appropriate, to optimise efficiency both at UPS and system level.

VMMS helps you achieve high efficiency even when UPS load levels are low – typical for redundant UPS systems. VMMS can optimise the load levels of power modules in a single 93PR UPS or in parallel systems, by suspending extra UPS capacity. This means not only greater efficiency at lower load levels, but optimum efficiency at all load levels.

### Maximum double conversion efficiency

The 93PR still offers the highest double conversion efficiency in the market, reaching above 96%.



The 93PR 25kW UPM (Uninterruptible Power Module)

#### **Highest power density**

The unity power factor maximises the true available power of the 93PR. This means it can deliver up to 20% more real power than other UPSs in its class.

The 75kW frame house an internal Maintenance Bypass Switch(MBS), DC breaker (Internal Battery version), Fast-acting bypass fuse.


### Maximum scalability

The highly scalable nature of the 93PR means that scaling up in response to increased demand takes minutes rather than hours. Scaling up can also be achieved without increasing the footprint – saving valuable floor space. The modular design allows for internal redundancy, which eliminates the need for an additional UPS for N+1 configurations.

External redundancy also improves scalability, by paralleling up to 8 frames for a total system size of up to 600 kW.

# Maximum Availability

Maximum availability is integral to business continuity, and integral to the design of the Eaton 93PR UPS. It ensures you can always access the power your mission-critical application requires.

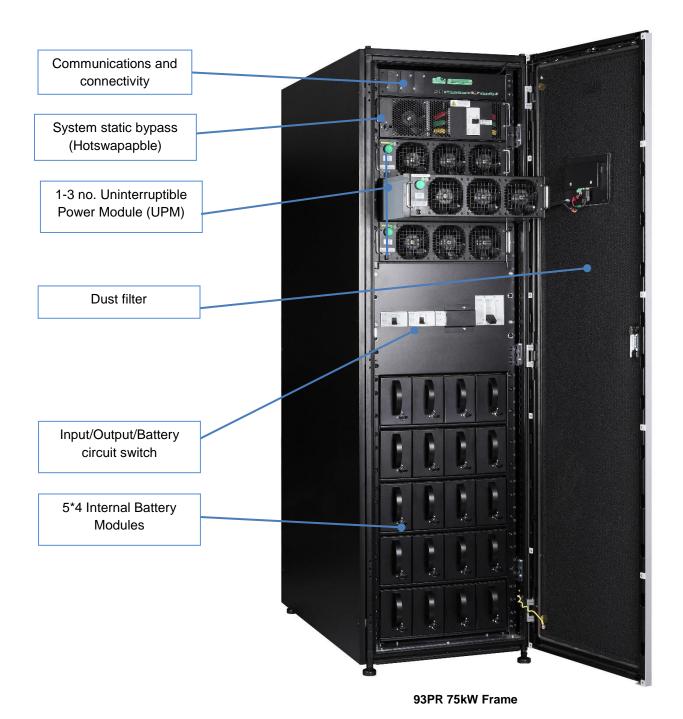

#### Hot swappable and hot scalable

Due its modular design, a 93PR power module can be replaced or added while another module continues protecting the load. This eliminates the need to go to bypass for module replacement or upgrading (MTTR: 0 minutes). Replacement and upgrade (N+1) operations typically take less than 10 minutes.

### **Centralised topology**

The 93PR's centralised topology is ideal for scalable systems, as it provides full bypass capacity from day one, whereas modular designs with static switches in every power module can have a severe negative impact on the selectivity of the system due to undersized static bypass. This can compromise the availability of the overall system.

# Take complete control

Managing and controlling your 93PR UPS is easy. Designed for the most advanced IT environments, the 93PR comes equipped with intuitive user interfaces, a large touchscreen LCD providing useful status information and back logs, and a full suite of power management and connectivity options.

#### The complete solution

The Eaton 93PR UPS is designed for the most advanced IT environments, and it comes with interfaces for Web and SNMP as standard.

In the event of an alert, the UPS system notifies users and administrators by email. If there's a prolonged power failure, the protected computer systems can be shut down smoothly using the Intelligent Power® Protector software also incorporated with the 93PR.

Your 93PR can be connected directly to your corporate network and the internet. This means you can then monitor and manage your UPS through a standard web browser.

#### Intelligent, intuitive, integral

The world-class Intelligent Power® Manager intelligent software solution of your 93PR UPS plugs into leading virtualisation management systems, including VMware vCenter, Microsoft SCVMM and Citrix XenCenter.

This user-friendly monitoring tool enables you to monitor and manage your UPS system as an integral part of your power infrastructure. It collects data through the network, then stores it in a database for viewing and analysis.

#### Information, access, ease of use

Intelligent Power Manager® (IPM) can be used to monitor and manage all Intelligent Power Protectors running in the network. This dramatically reduces the administrator's workload, and minimises the possibility of error.

The web-based interfaces of the Intelligent Power® software simplify usage, by allowing access from any computer in the LAN, as well as remotely via the internet. Power information is consolidated in the same tool used to monitor and manage physical and virtual servers, storage and networks.

In the event of power failure, IPM can trigger protective actions such as live migration of virtual machines, controlled shutdown, or disaster recovery.







Green light bars showing healthy UPS.

LED

light

bars



Red light bars showing alerts on system. Yellow light bars indicate battery and bypass status.

### Easy management

The 93PR provides easier access to detailed status information through its large, user-friendly 7" LCD touchscreen interface.

With the 93PR's graphical LCD interface you can track stats on energy savings, battery time, outage tracking, load profiling and much more.

The green/yellow/red LED light-bars make system status visible from a distance in data centres.

# 93PR 75kW Specifications

| General   |   |  |   |  |
|---|---|--|---|--|
| UPS output power rating (1.0 p.f.) kW   | 25  | 50   | 75  |  |
| Efficiency in double conversion mode  |   | >96%   |   |  |
| Efficiency in Energy Saver System (ESS)   |   | > 99%  |   |  |
| Static bypass rating  |   | 75kW   |   |  |
| UPM quantity  | 1   | 2  | 3   |  |
| Redundant configuration   | ·   | N+X  | •   |  |
| Parallel configuration  | Un  |  |   |  |
| Inverter/rectifier topology   |   | Up to 8 unit parallel to 600kW   |   |  |
| Altitude (max)  |   | Transformer-free IGBT with PWM  1000 m without derating (max 2000 m)   |   |  |
| ·   | 1000111   | without defailing (max   | . 2000 III)   |  |
| Input   |   | 2 ph . N . DF  |   |  |
| Input wiring  | 000/000   | 3 ph + N + PE  | 50/00 II-   |  |
| Nominal voltage rating (configurable)   |   | , 230/400, 240/415 V   |   |  |
| Input voltage range   | •   | 6 rectifier input, 10% b   | •   |  |
|   | <b>Low</b> -15% at 100°   | % load, -40% at 50% l<br>discharge   | oad without battery   |  |
| Input frequency range   |   | 40-72 Hz   |   |  |
| Input power factor  |   | 0.99   |   |  |
| Input ITHD  | < 3%  |  |   |  |
| Soft start capability   |   | Yes  |   |  |
| Internal backfeed protection  |   | Optional   |   |  |
| Output  |   |  |   |  |
| Output  |   |  |   |  |
| Output wiring   |   | 3 ph + N + PE  |   |  |
| <u> </u>  | 220/380   | 3 ph + N + PE<br>, 230/400, 240/415 V  | 50/60 Hz  |  |
| Output wiring   |   | ·  |   |  |
| Output wiring  Nominal voltage rating (configurable)  |   | , 230/400, 240/415 V   |   |  |
| Output wiring Nominal voltage rating (configurable) Output UTHD Output power factor   | < 1% (100% linea  | , 230/400, 240/415 V<br>ir load); < 5% (referen<br>1.0   | ce non-linear load)   |  |
| Output wiring  Nominal voltage rating (configurable)  Output UTHD   | < 1% (100% linea  | , 230/400, 240/415 V<br>ir load); < 5% (referen<br>1.0<br>0.8 lagging – 0.8 leadin   | ce non-linear load)   |  |
| Output wiring Nominal voltage rating (configurable) Output UTHD Output power factor Permitted load power factor Overload on inverter  | < 1% (100% linea<br>(<br>10 min 102-110%;   | 1, 230/400, 240/415 V<br>1r load); < 5% (referen<br>1.0<br>1.8 lagging – 0.8 leadir<br>60 sec 111-125%; 10<br>ms > 150%.   | ng<br>sec 126-150%; 300   |  |
| Output wiring Nominal voltage rating (configurable) Output UTHD Output power factor Permitted load power factor   | < 1% (100% linea<br>(<br>10 min 102-110%;<br>Contin   | 1, 230/400, 240/415 V<br>1 load); < 5% (referen<br>1.0<br>0.8 lagging – 0.8 leadin<br>60 sec 111-125%; 10<br>ms > 150%.<br>10 nuous < 125%, 20 ms  | ng sec 126-150%; 300  |  |
| Output wiring Nominal voltage rating (configurable) Output UTHD Output power factor Permitted load power factor Overload on inverter Overload when bypass available   | < 1% (100% linea<br>(<br>10 min 102-110%;<br>Contin   | 1, 230/400, 240/415 V<br>1r load); < 5% (referen<br>1.0<br>1.8 lagging – 0.8 leadir<br>60 sec 111-125%; 10<br>ms > 150%.   | ng sec 126-150%; 300  |  |
| Output wiring Nominal voltage rating (configurable) Output UTHD Output power factor Permitted load power factor Overload on inverter  | < 1% (100% linea<br>(<br>10 min 102-110%;<br>Contin   | 1, 230/400, 240/415 V<br>1 load); < 5% (referen<br>1.0<br>2.8 lagging – 0.8 leadin<br>60 sec 111-125%; 10<br>ms > 150%.<br>10 nuous < 125%, 20 ms<br>10 uses may limit the over  | ng sec 126-150%; 300  |  |
| Output wiring Nominal voltage rating (configurable) Output UTHD Output power factor Permitted load power factor Overload on inverter Overload when bypass available  Battery Battery type   | < 1% (100% linea<br>(<br>10 min 102-110%;<br>Contir<br><b>Note</b> : Bypass f                             | 1, 230/400, 240/415 V<br>1r load); < 5% (referen<br>1.0<br>0.8 lagging – 0.8 leadin<br>60 sec 111-125%; 10<br>ms > 150%.<br>10 nuous < 125%, 20 ms<br>10 uses may limit the over   | ng sec 126-150%; 300 1000% erload capability!   |  |
| Output wiring Nominal voltage rating (configurable) Output UTHD Output power factor Permitted load power factor Overload on inverter Overload when bypass available  Battery  | < 1% (100% linea<br>(<br>10 min 102-110%;<br>Contir<br><b>Note</b> : Bypass f                             | 1, 230/400, 240/415 V<br>1 load); < 5% (referen<br>1.0<br>2.8 lagging – 0.8 leadin<br>60 sec 111-125%; 10<br>ms > 150%.<br>10 nuous < 125%, 20 ms<br>10 uses may limit the over  | ng sec 126-150%; 300 1000% erload capability!   |  |
| Output wiring Nominal voltage rating (configurable) Output UTHD Output power factor Permitted load power factor Overload on inverter Overload when bypass available  Battery Battery type   | < 1% (100% linea<br>(<br>10 min 102-110%;<br>Contir<br><b>Note</b> : Bypass f                             | 1, 230/400, 240/415 V<br>1r load); < 5% (referen<br>1.0<br>0.8 lagging – 0.8 leadin<br>60 sec 111-125%; 10<br>ms > 150%.<br>10 nuous < 125%, 20 ms<br>10 uses may limit the over   | ng sec 126-150%; 300 1000% erload capability!   |  |
| Output wiring Nominal voltage rating (configurable) Output UTHD Output power factor Permitted load power factor Overload on inverter Overload when bypass available  Battery Battery type Charging method   | < 1% (100% linea<br>0<br>10 min 102-110%;<br>Contir<br><b>Note</b> : Bypass f                             | 1, 230/400, 240/415 V<br>1 load); < 5% (referen<br>1.0<br>2.8 lagging – 0.8 leadin<br>60 sec 111-125%; 10<br>ms > 150%.<br>10 nuous < 125%, 20 ms<br>10 uses may limit the over<br>VRLA<br>10 NBM technology or Flo  | ng sec 126-150%; 300 1000% erload capability!   |  |
| Output wiring Nominal voltage rating (configurable) Output UTHD Output power factor Permitted load power factor Overload on inverter Overload when bypass available  Battery Battery type Charging method Temperature compensation Battery nominal voltage (VRLA)   | < 1% (100% linear<br>(10 min 102-110%;<br>Contin<br>Note: Bypass f<br>480 V (40 x 12 V<br>Note: Strings w | v., 230/400, 240/415 V v. load); < 5% (referen 1.0) v. lagging - 0.8 leadin 60 sec 111-125%; 10 ms > 150%. v. luous < 125%, 20 ms uses may limit the over VRLA v. lagging - 0.8 leadin for the | ng sec 126-150%; 300 1000% erload capability! eat 2x 12 V, 240 cells) Itage may not be      |  |
| Output wiring Nominal voltage rating (configurable) Output UTHD Output power factor Permitted load power factor Overload on inverter Overload when bypass available  Battery Battery Battery type Charging method Temperature compensation Battery nominal voltage (VRLA)   | < 1% (100% linear  (10 min 102-110%;  Contin  Note: Bypass f  480 V (40 x 12 V  Note: Strings w           | v., 230/400, 240/415 V vir load); < 5% (reference 1.0 0.8 lagging – 0.8 leading 60 sec 111-125%; 10 ms > 150%. The result of the | ng sec 126-150%; 300 1000% erload capability!  eat  2x 12 V, 240 cells) Itage may not be 12 |  |
| Output wiring Nominal voltage rating (configurable) Output UTHD Output power factor Permitted load power factor Overload on inverter Overload when bypass available  Battery Battery type Charging method Temperature compensation Battery nominal voltage (VRLA)   | < 1% (100% linear<br>(10 min 102-110%;<br>Contin<br>Note: Bypass f<br>480 V (40 x 12 V<br>Note: Strings w | v., 230/400, 240/415 V vir load); < 5% (reference 1.0) 0.8 lagging — 0.8 leading 60 sec 111-125%; 10 ms > 150%. The rough of the rough  | ng sec 126-150%; 300 1000% erload capability!  eat  2x 12 V, 240 cells) Itage may not be    |  |
| Output wiring Nominal voltage rating (configurable) Output UTHD Output power factor Permitted load power factor Overload on inverter Overload when bypass available  Battery Battery Battery type Charging method Temperature compensation Battery nominal voltage (VRLA)  Charging current default(A) Charging current maximum(A)(output | < 1% (100% linear  (10 min 102-110%;  Contin  Note: Bypass f  480 V (40 x 12 V  Note: Strings w           | v., 230/400, 240/415 V v. load); < 5% (referention 1.0) v. leading = 0.8 | ng sec 126-150%; 300 1000% erload capability!  eat  2x 12 V, 240 cells) Itage may not be 12 |  |

# Load Bus Sync Controller MiniSlot connectivity (Web/SNMP, ModBus/Jbus, Relay)

| <u> </u> |     |      | 40.0 |    |
|----------|-----|------|------|----|
| Con      | nmu | nica | шо   | ns |

Minislot3 communication baysNetwork/SNMP interfaceYes, standardSerial portsBuilt-in host and device USBRelay inputs/outputs5 relay inputs and dedicated EPO

1 relay output

| Compl  | liance w | ith eta  | naarae  |
|--------|----------|----------|---------|
| COIIID | nance w  | itii Sta | nuai us |
|        |          |          |         |

 Safety
 IEC 62040-1

 EMC
 IEC 62040-2

 Performance
 IEC 62040-3

## **Mechanical**

| UPS dimensions (W x D x H)mm     | 600 x 1100 x 2020 |      |      |  |
|----------------------------------|-------------------|------|------|--|
| Weight(Kg) with internal Battery | 987               | 1015 | 1043 |  |
| Weight(Kg) w/o internal Battery  | 293               | 321  | 349  |  |