


Firmware Version	5.5.83
API	ONVIF (PROFILE S), ISAPI
Simultaneous Live View	Up to 6 channels
User/Host	Up to 32 users 3 levels: Administrator, Operator, and User
Client	iVMS-4200, iVMS-4500, iVMS-5200, Hik-Connect
Web Browser	IE8+, Chrome31.0-44, Firefox30.0-51, Safari8.0-11
Interface	
Communication Interface	1 RJ45 10M/100M self-adaptive Ethernet port
General	
Operating Conditions	-30 °C to +60 °C (-22 °F to +140 °F), Humidity 95% or less (non-condensing)
Power Supply	12 VDC $\pm$ 25%, 5.5 mm coaxial power plug;PoE(802.3af, class 3)
Power Consumption and Current	12 VDC,0.3 A, Max. 3.5 W; PoE: (802.3af, 36 V to 57 V), 0.2 A to 0.1 A, Max: 4.5 W
Protection Level	IP67, IK10
Material	Bottom base: metal, front cover & bubble: plastic
Dimensions	Φ 111 mm $\times$ 82.4 mm (4.4" $\times$ 3.2")
Weight	Camera: approx. 400 g (0.9 lb.) With package: approx. 600 g (1.3 lb.)

Available Model

DS-2CD1121-I (E) (2.8/4 mm)

Dimension

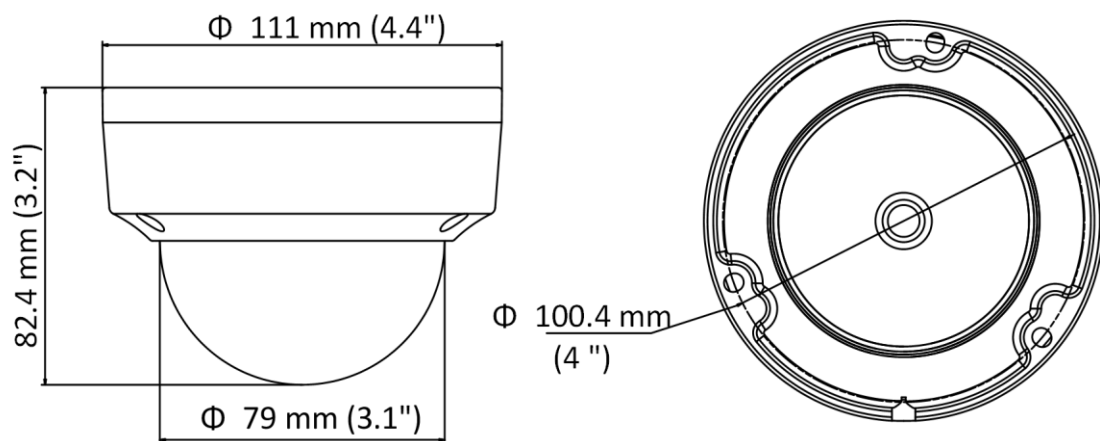

Unit: mm (inch)