


Voice Quality Testing (VQT)

(PESQ, POLQA v2.4, POLQA v3.0)

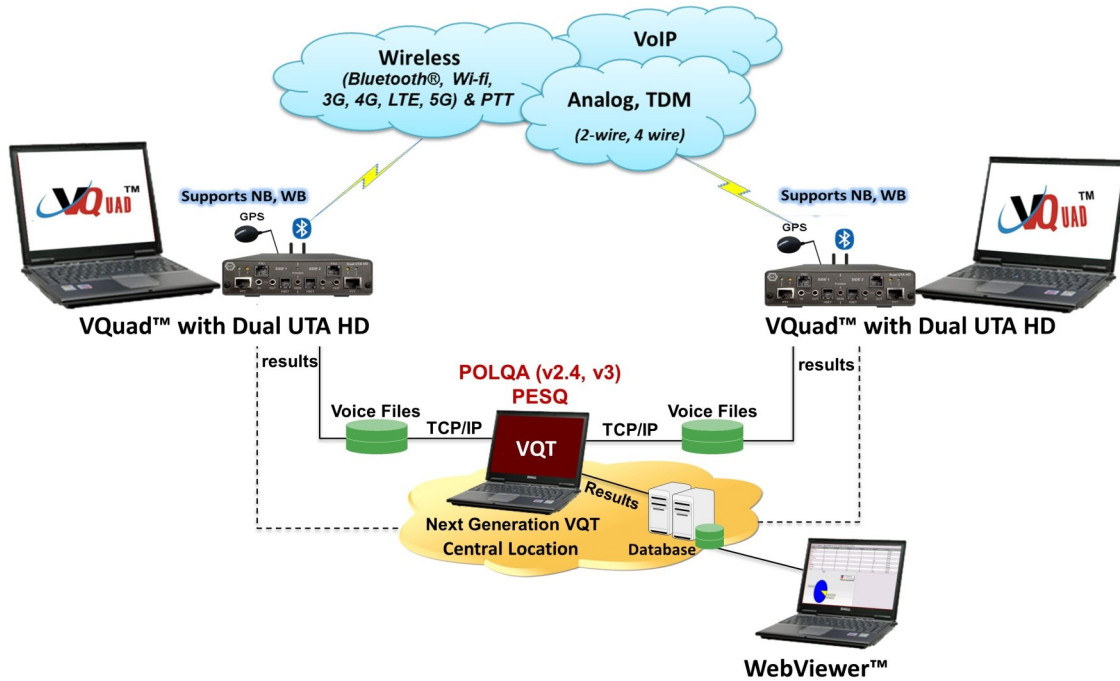

POLQA® is a registered trademark of OPTICOM. GL is one of the Test & Measurement manufacturers that has adopted POLQA/P.863 in its Voice Quality Test solution, by obtaining the essential rights to use POLQA® standard, and hereby acknowledge that the images or text references to POLQA used in this document originally copyrights with Opticom.

Overview

GL's **Voice Quality Testing (VQT)** software supports the next-generation voice quality testing standard for fixed, mobile and IP-based networks using POLQA v2.4 and v3 (ITU-T P.863), PESQ (ITU-T P.862), PESQ LQ / LQO (P.862.1), and PESQ WB (P.862.2).

The VQT fully supports analysis using POLQA ITU version 2.4 algorithm for NB (8000 sampling), WB (16000 sampling), and SWB (Super Wideband) (48000 sampling) in both manual and automated testing. It also supports analysis using latest PESQ ITU release including ITU-T P.862, 862.1 and 862.2 (supports PESQ, PESQ LQ, PESQ LQO, PESQ WB).

The optional POLQA v3 (latest version of the POLQA algorithm) supports Full Band Audio Analysis which provides improved scoring for mobile based VoLTE, 5G and OTT applications using EVS and OPUS codecs. This latest POLQA v3 includes analysis which is more sensitive to distortions across the entire audio spectrum. In addition, POLQA v3 supports less harsh analysis of micropauses within the speech, reacts with less sensitivity to linear frequency distortions, and includes a significantly improved and streamlined perceptual model.

The VQT software can work either independently, or in conjunction with [VQuad™ - Dual UTA HD](#), or in conjunction with [VQuad™ Probe HD](#).

VQT performs PESQ LQ/LQO/WB, and POLQA (NB, WB, SWB) simultaneously, using two voice files (Reference File and Degraded File) and provides the algorithm results in both a graphical and tabular format. Additional analytical results are displayed as part of the assessment such as MOS, E-Model, Signal Level, SNR, jitter, clipping, noise level, and delay (end to end as well as per speech utterance).

All results are saved to file and database for post processing viewing along with sophisticated searching on the results within the VQT application and using the [WebViewer™](#) (remote and local access).

For more details, please visit our web page <https://www.gl.com/voice-quality-testing-pesq-polqa.html>.



GL Communications Inc.

818 West Diamond Avenue - Third Floor, Gaithersburg, MD 20878, U.S.A

(Web) www.gl.com - (V) +1-301-670-4784 (F) +1-301-670-9187 - (E-Mail) info@gl.com

Features

- Voice Quality Testing (VQT) using POLQA ver 2.4 (ITU-T P.863), upgraded POLQA ver 3 (ITU-T P.863), and PESQ (ITU-T P.862)
- Updates associated with POLQA v3 include redesign perceptual model for Full Band Audio analysis which is validated for VoLTE, 5G and OTT apps (supporting EVS and OPUS codecs)
- Provides Active Speech and Noise Levels, Latency, Jitter, Clipping, and Power measurements
- Manual or Auto modes of operations with centralized data access
- Testing the voice quality over all types of telecom networks - Wireless, VoIP, TDM, and PSTN
- Measure the effect of Packet Jitter in VoIP Network
- Analyze the Effects of Codec Compression in Wireless Networks
- Automatic mode allows the GL's VQT to execute on a network system
- VQT CLI or API is enhanced to fully support both Windows® and Linux for remote operations
- Support for Central DB Primary & Secondary IP addresses configuration for backup and redundancy
- Remote monitoring with result query and real-time statistics using web based WebViewer™
- Real-time mapping of results with GPS option used in conjunction with VQuad™
- Full support for IPv6 as well as IPv4 (includes VQT, GL Listener, and VQTCLI)
- Playback and display of audio from within VQT software using Goldwave software


POLQA v3 Upgrade Enhancements

- POLQA v3 Super Wideband (SWB) supports 14kHz to full audio bandwidth up to 24kHz.
- Full band analysis improves accuracy in assessment of codecs such as EVS, OPUS, AAC and LC3, as these codecs are used in many OTT applications
- With Full band support the discriminative power of POLQA at the upper high quality range of the MOS scale is increased
- Current OTT voice services using VoLTE/5G include highly dynamic delay jitter which leads to variations of the duration of very short pauses during speech. POLQA v3 handles these variations with increased precision
- POLQA v3 reacts with less sensitivity to linear frequency distortions than POLQA v2.4. This makes measurements less dependent on the frequency characteristics of headsets
- Perceptual model of POLQA v3 is significantly improved and streamlined

Modes of Operation


Manual Measurement

The GL VQT software provides a user-friendly interface to perform manual voice quality assessments using Reference File and Degraded File. The results of the VQT algorithms, POLQA, PESQ LQ/LQO/WB are displayed both in tabular format as well as graphically. All results may be saved to file for post processing viewing along with sophisticated searching on the results within the VQT application.

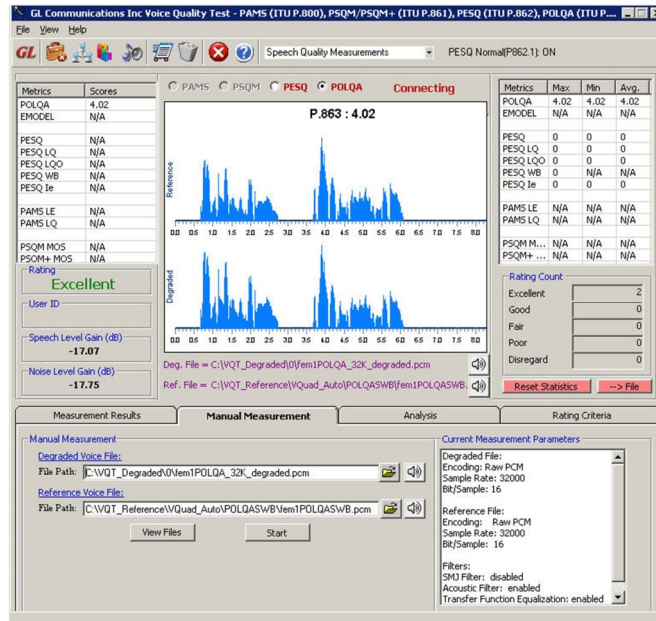

Auto Measurement

VQT can be executed in Auto Mode, which is used when VQT resides on a network computer and point to a single or multiple user-specified network drives/directories. Voice files are recorded to this network drive/directory and GL VQT automatically performs the voice quality algorithms and displays the results. Multiple GL VQT Auto-Measurement sessions may be configured, each session with a unique set of requirements and a unique reference voice file. In addition, it includes an option to analyze 12-bit degraded files in comparison with 16-bit reference files (NB, WB, SWB POLQA). Along with the standard sampling rates, POLQA also supports user-specified Sampling Rate (between 8K to 48K).

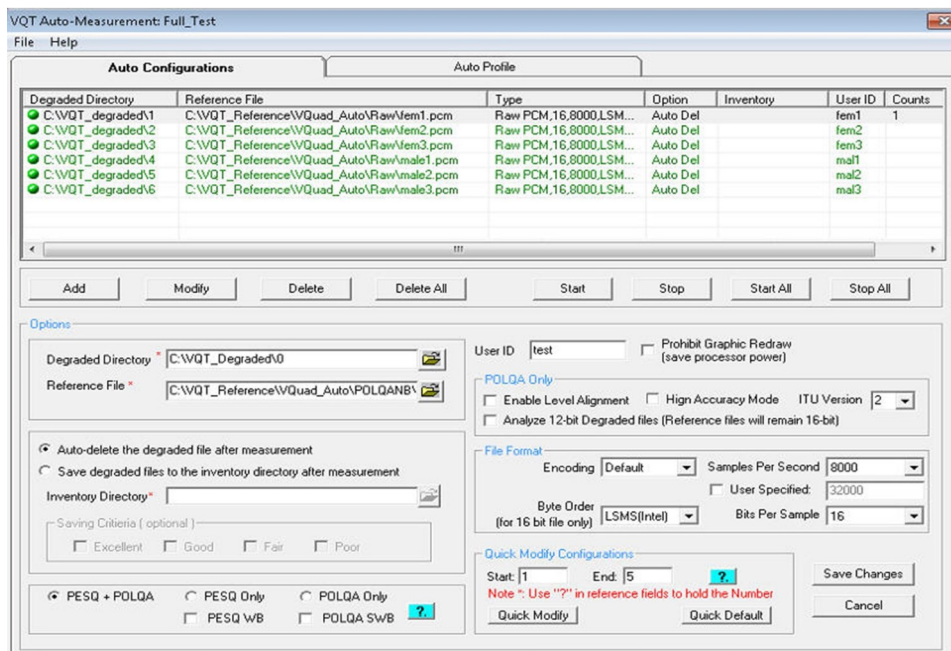

VQT Results

Analytical results are displayed as part of the assessment such as POLQA/PESQ MOS, E-Model, Signal Level, SNR, jitter, clipping, noise level, and delay (end-to-end as well as per speech utterance).

The screenshot shows the 'Analysis' tab of the VQT software. It displays measurement results for POLQA and ITU P.56 (POLQA) algorithms. The results are organized into columns for 'degraded' and 'reference' data. The 'POLQA' section shows metrics like Speech Activity (%), Active Speech Level (dBov), Mean noise Level (dBov), and SNR (dBov). The 'ITU P.56 (POLQA)' section shows similar metrics. A 'Report' button is visible. The bottom status bar shows 'graphical: always', 'degraded: raw', 'reference: raw', and a summary of counts: 'Excellent: 0 Good: 0 Fair: 0 Poor: 0'. The total measurements are 1.

VQT System statistics provides Algorithm and Rating statistics available for all measurement results.

Result	Maximum	Minimum	Average
POLQA	4.5	4.5	4.5
POLQA EModel	100	100	100
PESQ	4.5	4.5	4.5
PESQ LQ	4.5	4.5	4.5
PESQ LQO	4.55	4.55	4.55
PESQ WB	N/A	N/A	N/A
PAMS Listening Quality	5	5	5
PAMS Listening Effort	5	5	5
PSQM	5	5	5
PSQM+	5	5	5
Jitter/Average Offset (msec)	0	0	0
Minimum Offset (msec)	0	0	0

Below the table, there is a summary of counts for each rating: Excellent: 0, Good: 0, Fair: 0, Poor: 0, Disregard: 0.

Timestamp	Timeslot/Trunk	Rating	Fair/Poor Causes	Scores	Degraded Fi
2013/02/21 5:50:09 PM	Auto	Excellent		POLQA=4.50, PESQ=4.46, PESQ_LQ=4.48...	C:\VQT_De
2013/02/21 5:50:23 PM	Auto	Excellent		POLQA=4.50, PESQ=4.37, PESQ_LQ=4.44...	C:\VQT_De
2013/02/21 5:50:38 PM	Auto	Excellent		POLQA=4.30, PESQ=4.47, PESQ_LQ=4.49...	C:\VQT_De
2013/02/21 5:50:52 PM	Auto	Excellent		POLQA=4.50, PESQ=4.36, PESQ_LQ=4.43...	C:\VQT_De
2013/02/21 5:55:39 PM	Auto	Excellent		POLQA=4.21, PESQ=4.46, PESQ_LQ=4.48...	C:\VQT_De
2013/02/21 5:55:56 PM	Auto	Excellent		POLQA=4.50, PESQ=4.41, PESQ_LQ=4.46...	C:\VQT_De
2013/02/21 5:56:13 PM	Auto	Excellent		POLQA=4.34, PESQ=4.46, PESQ_LQ=4.48...	C:\VQT_De
2013/02/21 5:56:31 PM	Auto	Excellent		POLQA=4.50, PESQ=4.41, PESQ_LQ=4.46...	C:\VQT_De
2013/02/21 5:56:47 PM	Auto	Excellent		POLQA=4.29, PESQ=4.46, PESQ_LQ=4.48...	C:\VQT_De
2013/02/21 5:57:07 PM	Auto	Excellent		POLQA=4.50, PESQ=4.41, PESQ_LQ=4.45...	C:\VQT_De
2013/02/21 5:57:46 PM	Auto	Excellent		POLQA=4.30, PESQ=4.47, PESQ_LQ=4.49...	C:\VQT_De

At the bottom, there are checkboxes for 'View Fair/Poor Measurements Only' and 'Capture Events to File'. A 'Counter' field shows 270.


The user may configure a Rating Criteria for all VQT algorithms as well as the additional analytical results. The rating criteria may be configured for Excellent, Good, Fair, and Poor and the results of the rating criteria may be saved to file for post processing viewing.

Criteria	Excellent	Good	Fair	Poor
<input checked="" type="checkbox"/> POLQA	4.5 -- 4	4 -- 3	3 -- 2	2 -- 0
<input checked="" type="checkbox"/> PESQ	4.5 -- 4	4 -- 3	3 -- 2	2 -- 0
<input checked="" type="checkbox"/> PESQ LQ	4.5 -- 4	4 -- 3	3 -- 2	2 -- 0
<input checked="" type="checkbox"/> PESQ LQO	4.5 -- 4	4 -- 3	3 -- 2	2 -- 0
<input checked="" type="checkbox"/> PESQ WB	4.5 -- 4	4 -- 3	3 -- 2	2 -- 0
<input checked="" type="checkbox"/> PAMS LQ	5 -- 4	4 -- 3	3 -- 2	2 -- 0

Below the table, there are buttons for 'Default', 'Commit', 'Re-Evaluate', and 'Disregard'. A visual scale shows 'Excellent' (4), 'Good' (3), 'Fair' (2), and 'Poor' (0). The bottom status bar shows 'graphical: always', 'degraded: raw', 'reference: raw', and a summary of counts: 'Excellent: 0 Good: 0 Fair: 0 Poor: 0'. The total measurements are 1.

Voice Quality Testing (PESQ)


PESQ provides an objective measure that predicts the results of subjective listening tests on telephony systems. PESQ incorporates many new developments that distinguish it from earlier models for assessing codecs. These innovations allow PESQ to be used with confidence to assess end-to-end speech quality as well as the effect of such individual elements as codecs. The below figure shows VQT PESQ Measurement Results.

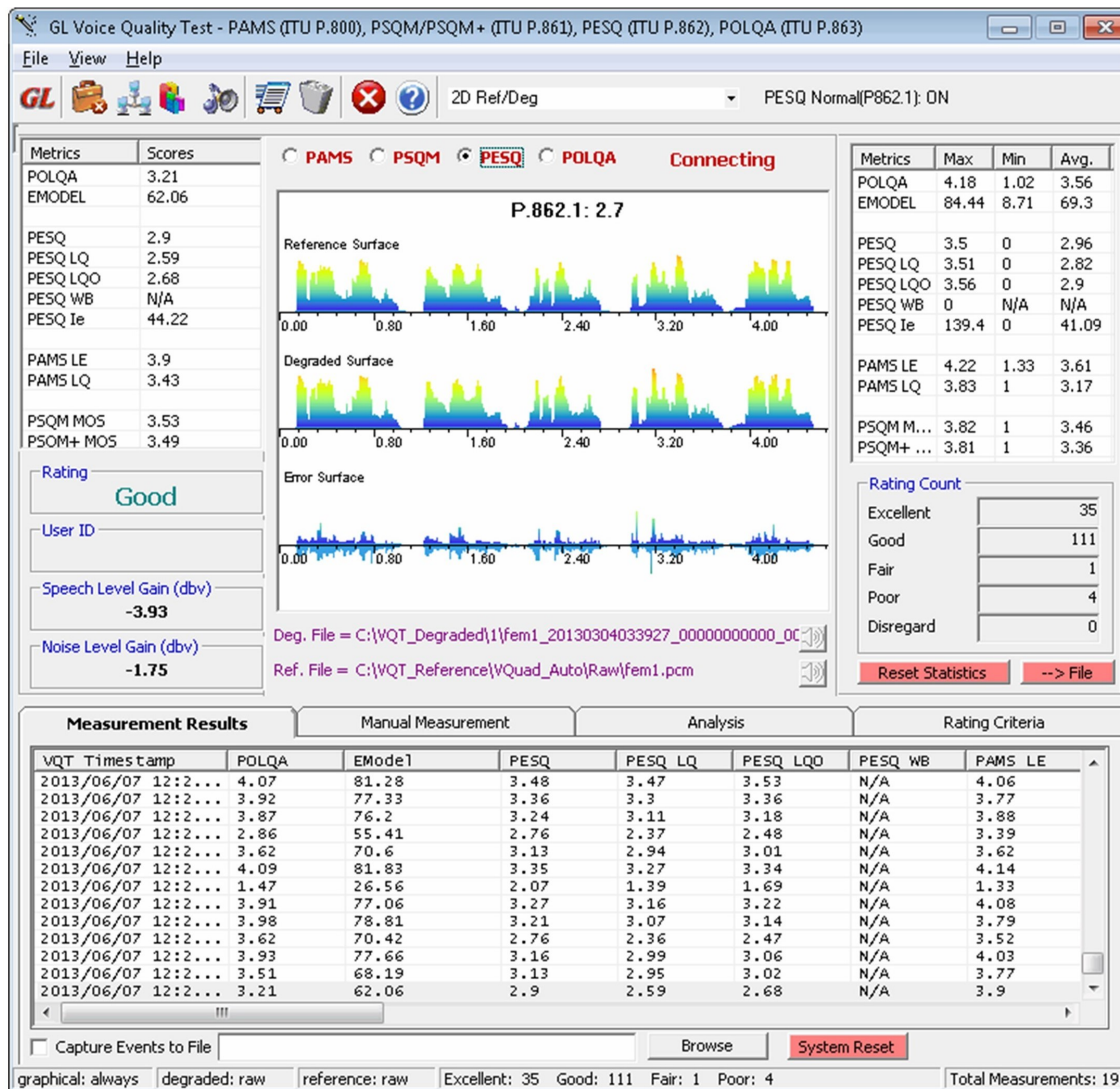

- VQT PESQ supports analysis of 16-bit uncompressed PCM and WAV files, including NB (8000 sampling) and WB (16000 sampling)
- VQT PESQ supports analysis of 8-bit compressed a-Law and mu-Law files
- PESQ analysis results include PESQ, PESQ LQ, PESQ LQO, PESQ WB, PESQ Ie, and PESQ per Utterance
- PESQ Results also include Signal Level, Noise Level, Delay, Delay per Utterance, and Jitter
- Playback and display of audio from within VQT software using Goldwave Software

Voice Quality Testing (POLQA)


Perceptual Objective Listening Quality Analysis (POLQA), the successor of PESQ (ITU-T P.862) analysis, is the next generation voice quality testing standard for fixed, mobile and IP-based networks. Based on ITU-T P.863 standard, POLQA supports the HD-quality speech coding and network transport technology, with higher accuracy for 3G, 4G/LTE and VoIP networks. Upgrading to 3rd edition of ITU-T P.863, POLQA extends its scope and applicability towards 5G telephony and OTT codecs. The below figure shows VQT POLQA Measurement Results.

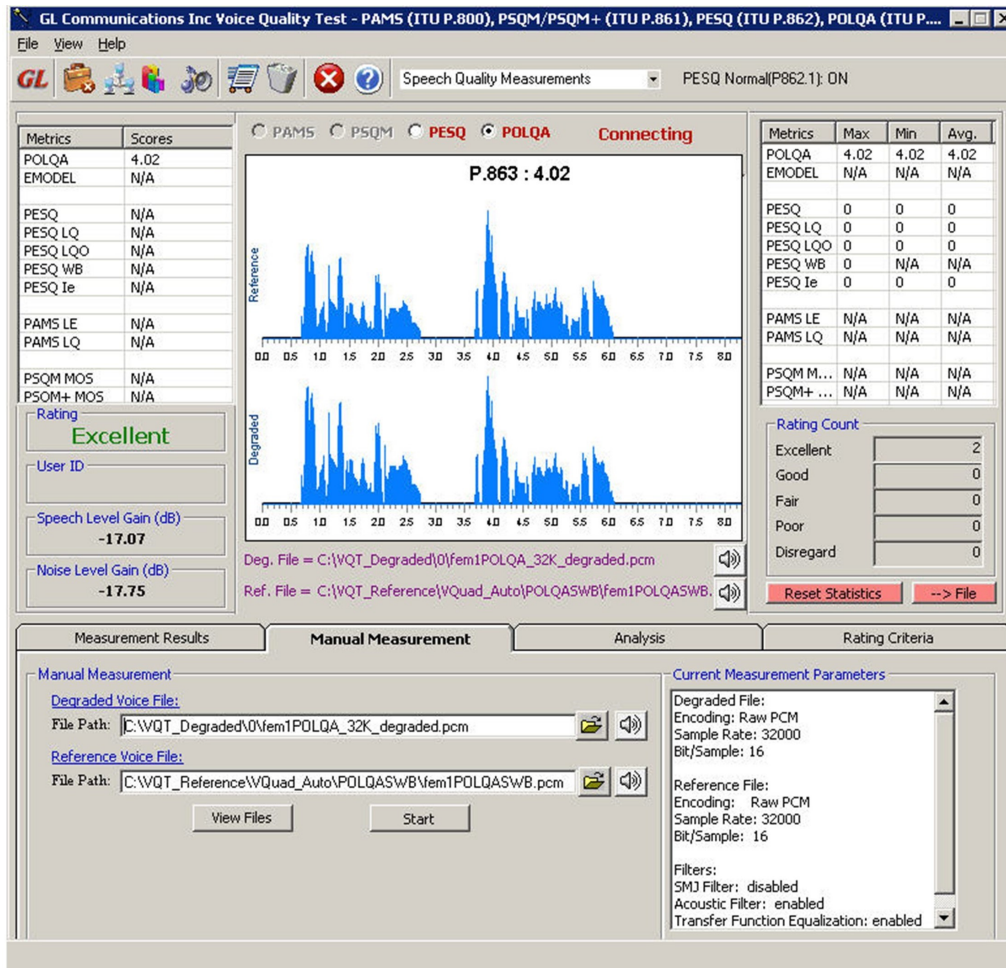

- VQT POLQA supports analysis of 16-bit uncompressed PCM and WAV files, including NB (8000 sampling), WB (16000 sampling), SWB (48000 sampling)
- POLQA supports user-specified Sampling Rate (specify any rate between 8K to 48K)
- VQT POLQA supports analysis of 8-bit compressed a-Law and mu-Law files
- VQT POLQA supports 12-bit Raw PCM Degraded voice files (NB, WB, SWB)
- POLQA analysis results include POLQA MOS, E-Model R-Factor, Signal Level, Noise Level, Delay, and Jitter
- VQT optionally supports POLQA v3 for VoLTE, 5G and OTT analysis
- Playback and display of audio from within VQT software using Goldwave software

VQT WebViewer™

The results/events associated with VQT (PESQ, POLQA) analysis is sent to the central database and can be queried using the GL VQT WebViewer™ (web browser). Outputs of the query can be displayed in tabular or graphical format while also output to Excel or Text. Results can also be plotted on Google Maps (GPS connectivity is required). For details, visit <https://www.gl.com/web-based-client-for-voice-and-data-quality-testing.html> webpage. The below figure shows VQT Results plotted on Google Map.

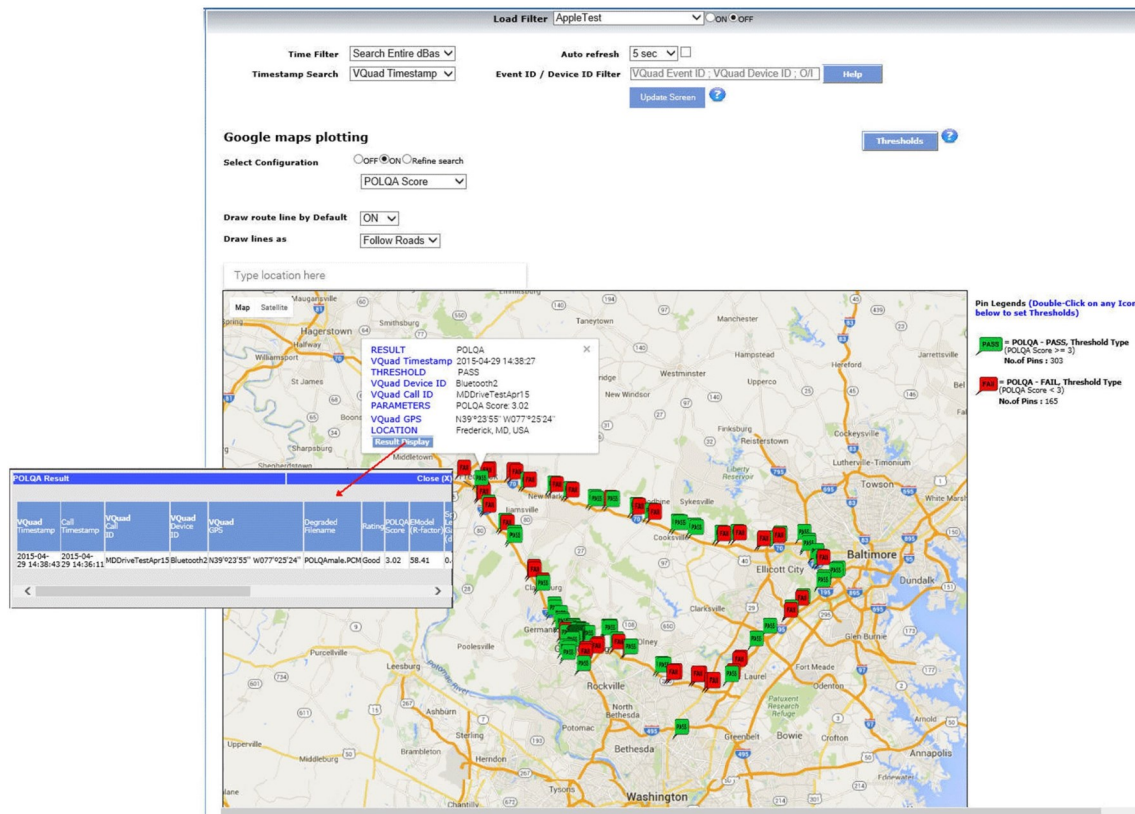

- Real-time mapping of results with GPS option used in conjunction with VQuad™
- The results can be accessed remotely from a database, queried and displayed in web browser using WebViewer™ either in tabular or graphic format

Webviewer

Load Filter

abc1

ON OFF

Time Filter

Search Entire dBas

Timestamp Search

VQuad Timestamp

Records Per Page

200

Auto refresh

5 sec

Event ID / Device ID Filter

VQuad Event ID ; VQuad Device ID ; O/I

Help

Update Screen

Help

Error Events

Thresholds

VQT POLQA

VQad Timestamp	Call Timestamp	VQad Call ID	VQad Device ID	VQad Latitude	VQad Longitude	Degraded Filename	Rating	POLQA v3	POLQA Score	EModel (R-factor)	Speech Level Gain (dB)	Noise Level Gain (dB)	Active Speech Level - Ref (dBm)	Active Noise Level - Ref (dBm)	Mean Noise Level - Ref (dBm)	Mean SNR - Ref (dB)	SNR - Ref (dB)	Active Speech Ratio - Ref (%)	Active Noise Ratio - Ref (%)	POLQA OWD (ms)	Per Utterance Delay Ave (ms)	Per Utterance Delay Min (ms)	Per Utterance Delay Max (ms)	Number of Utterances	Jitter Ave (ms)	Max Neg Jitter (ms)	Max Pos Jitter (ms)
08/04/2020 08/04/2020 10:34:39	10:53:57	POLQATESTandRTDandOWD	412D2	0	0	fem1Polqa	Excellent	4.50	100		-9.14	-9.13	-24.28	-33.42	-62.79	-71.92	38.51	38.50	35	508	510.88	508	513.75	2	1.15	-5.50	6.38
07/29/2020 07/29/2020 10:17:11	10:12:12	FXOPOLQATEST	Device12	12.70	15.70	male1Polqa	Excellent	4.10	82.13		-19	-12.73	-22.90	-41.90	-61.65	-74.38	7532.48	35	515.75	514.69	513.62	515.75	2	0.98	-2.38	4.12	
07/29/2020 07/29/2020 10:16:54	10:12:12	FXOPOLQATEST	Device12	12.70	15.70	male1Polqa	Excellent	4.06	80.92		-5.17	-5.23	-22.90	-28.07	-61.65	-66.88	38.75	38.81	32	516.25	515.12	514	516.25	2	1.10	-4.38	6.88
07/29/2020 07/29/2020 10:16:38	10:12:12	FXOPOLQATEST	Device12	12.70	15.70	fem1Polqa	Good	3.90	76.79		-19.75	-10.90	-24.28	-44.03	-62.79	-73.69	38.51	29.66	33	514.50	516.44	514.50	518.38	2	1.19	-4.38	6.62
07/29/2020 07/29/2020 10:16:21	10:12:12	FXOPOLQATEST	Device12	12.70	15.70	fem1Polqa	Excellent	4.29	88.04		-5.73	-5.56	-24.28	-30.01	-62.79	-68.35	38.51	38.34	35	527.50	525.50	523.50	527.50	2	1.35	-6	5.88
07/29/2020 07/29/2020 10:10:32	10:05:36	FXOPOLQATEST	Device12	12.70	15.70	male1Polqa	Excellent	4.07	81.14		-18.99	-12.62	-22.90	-41.89	-61.65	-74.27	38.75	32.38	29	524.50	524.50	524.50	524.50	2	1.26	-7.62	3
07/29/2020 07/29/2020 10:10:15	10:05:36	FXOPOLQATEST	Device12	12.70	15.70	male1Polqa	Excellent	4.05	80.64		-5.15	-5.30	-22.90	-28.05	-61.65	-66.95	38.75	38.90	32	527.75	530.19	527.75	532.62	2	1.18	-4	3
07/29/2020 07/29/2020 10:09:59	10:05:36	FXOPOLQATEST	Device12	12.70	15.70	fem1Polqa	Good	3.91	77.01		-19.79	-10.92	-24.28	-44.07	-62.79	-73.71	38.51	29.64	33	528.12	525.06	522	528.12	2	1.33	-7	2.88
07/29/2020 07/29/2020 10:09:42	10:05:36	FXOPOLQATEST	Device12	12.70	15.70	fem1Polqa	Excellent	4.08	81.59		-5.71	-5.87	-24.28	-29.99	-62.79	-68.66	38.51	38.67	34	521.88	519.88	517.88	521.88	2	1.19	-6.25	7.75
07/29/2020 07/29/2020 10:03:57	09:58:47	FXOPOLQATEST	Device12	12.70	15.70	male1Polqa	Good	3.88	76.49		-19.02	-12.86	-22.90	-41.92	-61.65	-74.51	38.75	32.59	29	539.38	536.69	534	539.38	2	1.37	-6.25	3.38
07/29/2020 07/29/2020 10:03:40	09:58:47	FXOPOLQATEST	Device12	12.70	15.70	male1Polqa	Excellent	4.22	85.57		-5.16	-5.18	-22.90	-28.06	-61.65	-66.83	38.75	38.73	32	526.25	519.44	512.62	526.25	2	1.44	-3.25	6.38
07/29/2020 07/29/2020 10:03:23	09:58:47	FXOPOLQATEST	Device12	12.70	15.70	fem1Polqa	Good	3.83	75.27		-19.75	-10.95	-24.28	-44.03	-62.79	-73.74	38.51	29.71	33	531.88	535.94	531.88	540	2	1.33	-4.38	6.38
07/29/2020 07/29/2020 10:03:07	09:58:47	FXOPOLQATEST	Device12	12.70	15.70	fem1Polqa	Excellent	4.20	84.92		-5.73	-5.41	-24.28	-30.01	-62.79	-68.20	38.51	38.19	35	511.88	513.81	511.88	515.75	2	1.12	-3.25	5.12
07/29/2020 07/29/2020 10:02:50	09:58:47	FXOPOLQATEST	Device12	12.70	15.70	male1Polqa	Excellent	4.38	91.56		-19	-12.79	-22.90	-41.90	-61.65	-74.45	38.75	32.55	29	521.88	521.88	521.88	521.88	2	1.12	-4	2.62

VQuad™ POLQA Events

As an option, POLQA can be added directly to VQuad™ software with support for automated testing within the VQuad™ script. In this scenario the degraded voice files remain at the VQuad™ node for analysis and display within the VQuad™ software. The below figure shows VQuad™ POLQA Events.

Timestamp	Phone ID	Deg File ...	POLQA S...	E-Model ...	Rating	Speech L...	Noise Le...	Ave Jitter	Min Jitter
02/19/2013 11:22:42 AM	VQFXD-1	fem1test	3.62	70.47	Pass	-14.50	-7.29	2.19	0.00
02/19/2013 11:23:00 AM	VQFXD-1	male1test	3.47	67.35	Fail	-14.78	-3.04	0.06	-0.13
02/19/2013 11:24:07 AM	VQFXD-1	fem1test	3.60	69.97	Pass	-14.51	-7.44	2.56	0.00
02/19/2013 11:24:24 AM	VQFXD-1	male1test	3.48	67.54	Fail	-14.79	-2.74	0.31	0.00
02/19/2013 11:27:16 AM	VQFXD-1	fem1test	3.68	71.79	Pass	-14.50	-7.22	1.81	0.00
02/19/2013 11:27:33 AM	VQFXD-1	male1test	3.44	66.75	Fail	-14.78	-2.74	0.56	-1.13
02/19/2013 11:28:40 AM	VQFXD-1	fem1test	3.57	69.50	Pass	-14.50	-7.23	1.81	0.00
02/19/2013 11:28:58 AM	VQFXD-1	male1test	3.46	67.15	Fail	-14.79	-2.55	0.31	0.00
02/19/2013 11:31:50 AM	VQFXD-1	fem1test	3.61	70.33	Pass	-14.50	-6.64	0.25	-0.50
02/19/2013 11:32:07 AM	VQFXD-1	male1test	3.35	65.00	Fail	-14.79	-2.03	0.31	0.00
02/19/2013 11:33:14 AM	VQFXD-1	fem1test	3.69	71.97	Pass	-14.50	-6.86	0.31	0.00
02/19/2013 11:33:31 AM	VQFXD-1	male1test	3.43	66.51	Fail	-14.77	-2.46	0.06	-0.13

POLQA Status: Finished Last Rating Threshold: 3.50 POLQA Licensed

VQT Command Line Interface

The VQT Command Line Interface (CLI) is designed to remotely access various application functionalities and thus controlling VQT nodes located at various destinations. The supporting commands helps the VQT users to run the application installed on remote PC, get the connection status, run the analysis, load Auto Measurement configuration, start/stop Auto Measurement, save events captured to file, transfer the events captured to client, get any file from server or even get latest log, and other operations. The VQT CLI is supported on Windows® and Linux systems .

```

Administrator: C:\Windows\system32\cmd.exe - vqtcli 192.168.1.188
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\Poornima>cd\
C:\>cd C:\Program Files\GL Communications Inc\UQT
C:\Program Files\GL Communications Inc\UQT>vqtcli 192.168.1.18
UQT Remote Access (client) v.4.8.0
UQT IP Address: 192.168.1.18
UQT: Connecting...
Deamon: Connecting...
UQT: Connected.
UQT: Connecting...
Deamon: Connected.

vqt C:\UQT_Reference\UQuad_Auto\Raw\Fem1.pcm C:\UQT_Degraded\1\record_2013032112
4609_I_Port1ToPort0_f2_20130321124601_p.pcm 1 1
UQT: Message sent.
PAMS LE: 4.96
PAMS LQ: 4.90
PSQM: 0.00
PSQM PLUS: 0.00
PESQ: 4.44
PESQ LQ: 4.47
PESQ LQ0: 4.51
PESQ WB: -1.00
POLQA: 4.50
EModel: 100.00

```

Buyer's Guide

Item No	Product Description
VQT002	Voice Quality Testing (PESQ only)
VQT006	Voice Quality Testing (POLQA v 2.4)
VQT007	Voice Quality Testing (POLQA v3)

Item No	Related Hardware
VQT251	Dual UTA HD Next generation Dual UTA with FXO Wideband support
VQT252	Dual UTA HD – Bluetooth Option
VQT280	VQuad™ Probe HD (with Dual UTA HD)

Item No	Related Software
VQT010	VQuad™ Software
VBA032	Near Real-time Voice-band Analyzer
EMU037	Echo Measurement Utility (EMU) Software
VQT040	WebViewer™
SA048	Goldwave Software

For complete list of VQT products, please visit <https://www.gl.com/voice-quality-testing-pesq-polqa.html> webpage.



GL Communications Inc.

818 West Diamond Avenue - Third Floor, Gaithersburg, MD 20878, U.S.A
 (Web) www.gl.com - (V) +1-301-670-4784 (F) +1-301-670-9187 - (E-Mail) info@gl.com