



Key Feature

- 2 MP HD camera with high quality image
- 120 ° wide angle of view
- 3.5-inch colorful LCD screen with 480 × 320 resolution
- Unlocks by cards and pin-codes
- Supports configuration via Web remotely

Specification

System parameters

Operating system	Embedded Linux operation system
ROM	4 GB
RAM	512 MB
CPU	Embedded processor

Display parameters

Screen size	3.5-inch
Operation method	Display screen, physical buttons
Type	Colorful LCD
Resolution	480 × 320

Video parameters

Lens	2 MP HD camera
Resolution	Main stream: 1920 × 1080p ,720p Sub stream: 640 × 480
FOV	Horizontal: 70 ° , Vertical: 118 ° , Diagonal: 132°
WDR	Support

Supplement light	Low illumination, IR supplement lights
------------------	--

Video compression standard	H.264
----------------------------	-------

Audio parameters

Audio compression standard	G.711 U, G.711 A
----------------------------	------------------

Audio input	Built-in omnidirectional microphone
-------------	-------------------------------------

Audio output	Built-in loudspeaker
--------------	----------------------

Audio compression bitrate	64 Kbps
---------------------------	---------

Audio quality	Noise suppression and echo cancellation
---------------	---

Volume adjustment	Adjustable
-------------------	------------

Capacity

User capacity	/
---------------	---

Face capacity	/
---------------	---

Card capacity	10000
---------------	-------

Linked network camera capacity	500
--------------------------------	-----

Network parameters

Communication protocol	TCP/IP, RTSP
------------------------	--------------

Wired network	Support
---------------	---------


Wi-Fi standard	/
----------------	---

Bluetooth version	/
-------------------	---

3G/4G standard	/
----------------	---

Authentication	
Card type	Mifare card
Device interfaces	
Alarm input	8
Network interface	1 10/100/1000 Mbps self-adaptive, RJ45 analog interface
TAMPER	1
Exit button	2
RS-485	1
USB	0
Wiegand	1
TF card	/
Alarm output	2
Lock control	1
Door contact input	2
Power interface	1
Performances	
Multi-factor authentication	10000
General	
Button	14 physical buttons
Installation	Flush mounting
Indicator	/
Weight	Without package: 1.05 kg With package: 2.166 kg
Protective level	IP 65
Working temperature	-40 ° C to +55 ° C (-40 ° F to +135 ° F)
Working humidity	10% to 95%
Dimensions	357.3 mm × 124.3 mm × 55.3 mm (14.07" × 4.89" × 2.18")
Battery	/
Power supply	≤ 10 W
Application environment	Outdoor
Language	English, Portuguese (Brazil), Russian, Spanish, French, Turkish, Vietnamese, Ukrainian

Dimension

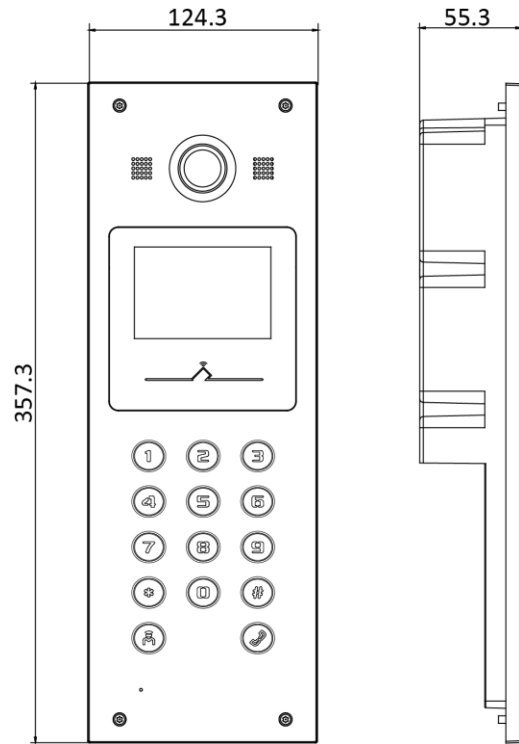

Unit:mm

Available Model

DS-KD3003-E6,

Distributed by

**HIKVISION®****Headquarters**

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA

T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia

T +61-2-8599-4233
salesau@hikvision.com

Hikvision India

T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada

T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand

T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe

T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy

T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil

T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey

T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia

T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland

T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa

Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France

T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan

T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam

T +84-974270888
sales.vt@hikvision.com

Hikvision UAE

T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore

T +65-6684-4718
sg@hikvision.com

Hikvision Spain

T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent

T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong

T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia

T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea

T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland

T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia

T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia

sales.colombia@hikvision.com